

三久穀物篩選機

SUNCUE PRE-CLEANER

穀物先經過粗選，可增加入穀量，加快乾燥速度，省油省電，能更均勻乾燥，減少乾濕粒

Enhance drying evenness, increase loading capacity and drying efficiency.

Power and fuel saving, and reduce uneven moisture.




SPC-50

規格 SPECIFICATIONS

項目Item	機型Model	SPC-15	SPC-50
選別方式 Function		風選+篩選 Winnow and Sieve	
適用穀物 Application		稻穀、小麥、大麥、玉米、高粱等 Paddy, Wheat, Barley, Corn, Sorghum etc.	
機台尺寸 Dimension 長x寬x高mm LxWxH mm		2,173x1,853x1,756	2,918x2,370x3,278
空機重量 Net Weight 約公斤 Approx. kg		900	2,200
處理量 Capacity 噸/小時 ton/ hr		5~15	20~50
電壓 Voltage		三相3P, 220V/380V/415V/440V, 50/60Hz	
動力 Power Consumption kW, HP kW, HP		3 , 4	7.87 , 10.5

配置圖 PROCESS

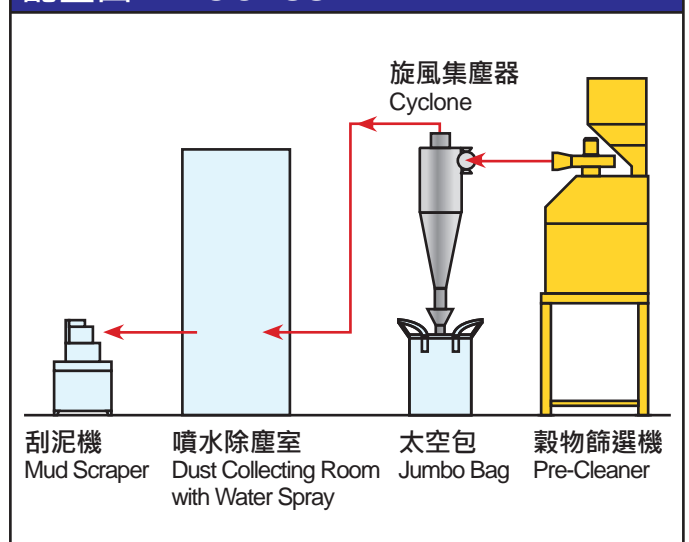

●圖示及規格僅供參考，實際產品規格以客戶簽署訂單及出貨實物為主。●腳架與維修平台、入料斗、出料斗、風管為選配件。●處理量係指日本聯合收割機所收割之穀物。如夾雜率高、含水率高，則無法達上表所列之處理量。
●The specification and graph are for reference only. Actual specification of SUNCUE product shall be based on the Sales Confirmation which customers sign and delivered products. ●Stand, maintenance platform, inlet hopper, outlet hopper and air pipe are optional. ●The handling capacity is based on using Japanese combine harvester. If impurity rate and moisture content are too high, then the actual handling capacity might be lower than listed.



特點 FEATURES

- 可依濕穀品質調整篩選量
- 風選+篩選設計，篩後穀物清潔度高
- 處理量大，雙篩網同步篩選
- 省空間
- 入穀、出穀前後雙風選
- Pre-cleaning speed can be adjusted according to wet grain quality.
- High purity after pre-cleaning thanks to winnowing and sieving.
- Dual screens work simultaneously to increase capacity.
- Saves space.
- Dual winnowing at grain entry and exit.

安裝實績 INSTALLATION



韓國 Korea



台灣 Taiwan



菲律賓 Philippines



印尼 Indonesia

SUNCUE[®]
三久股份有限公司
SUNCUE COMPANY LTD.

41278 台中市大里區仁化路105號
No. 105, Renhua Rd., Dali Dist., Taichung City 41278, Taiwan, R.O.C.
☎+886-4-2339-7171 ☎+886-4-2330-2939
🌐www.suncue.com
✉sales@suncue.com



服務中心 Service Center